

# Bacula Processing Appliance BPA-681E-TR

6U 8-socket system with 128 DIMMs, 24 NVMe/SAS/SATA drive bays, and 24 PCIe slots

## Key Applications


Large Environments Primary and Secondary Bacula  
Enterprise Backup Processing Unit

## Key Features


- Octa Socket E (LGA-4677) 4th Generation Intel® Xeon® Scalable processors;
- 128 DIMM Slots; Up to 32TB DDR5-4800MHz ECC RDIMM/RDIMM-3DS;
- Optional PCIe configurations up to 24 PCIe slots with support for 12 double-width GPU/Accelerator cards;
- 24x 2.5" Hot-swap NVMe/SAS3/SATA3 drive bays ; 2x internal M.2 NVMe/SATA; Optional RAID support via storage add-on card;
- 10 heavy duty fans w/ optimal fan speed control;



Form Factor	6U Rackmount Enclosure: 449 x 265 x 841mm (17.68" x 10.4" x 33.1") Package: 720 x 922 x 1080mm (28.34" x 36.3" x 42.5")
Processor	8 Socket E (LGA-4677) <a href="#">4th Gen Intel® Xeon® Scalable processors</a> Up to 60C/120T; Up to 112.5MB Cache per CPU
GPU	Up to 12 double-width GPU(s)
System Memory	Slot Count: 128 DIMM slots Max Memory (2DPC): Up to 32TB 4800MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bay(s) <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" SATA drive bay(s)</li> </ul> Option A: Total 24 bay(s) <ul style="list-style-type: none"> <li>• 24 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s)</li> </ul> (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 3.0 x4 NVMe/SATA slot(s) (M-key 2280/22110)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 12 PCIe 5.0 x16 FHFL slot(s)</li> <li>• 2 PCIe 5.0 x16 LP slot(s)</li> </ul> Option A* <ul style="list-style-type: none"> <li>• 12 PCIe 5.0 x16 FHFL slot(s)</li> </ul> M.2: 2 M.2 NVMe/SATA slot(s) (M-key 2280/22110)
On-Board Devices	Chipset: Intel® C741 Network Connectivity: 1 RJ45 1GBASE-T IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) 1 RJ45 1 GbE LAN port(s) USB: 2 USB 3.0 port(s) (rear) 2 port(s) (front) Video: 1 VGA port(s) (Front) 1 DisplayPort port(s) (Rear)

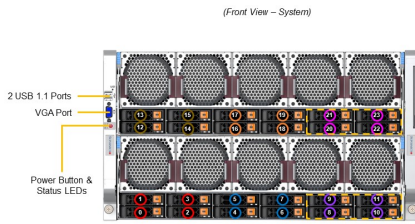

Drive Bay	Description
1 - 11 - 2	Default - 8 Hot-swap 2.5" SATA3 Drive Bays
3 - 4	24 Hot-swap 2.5" NVMe/SAS/SATA3 Drive Bays via Optional Cable or RAID Controller



Slot	Description
1 - 2	Default - 12 PCIe 5.0 x16 FHFL
3 - 4	Optional - 12 PCIe 5.0 x16 FHFL



System Cooling	Fans: 10 Heavy duty counter-rotating 8cm Fan(s)
Power Supply	2600W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 242.5 lbs (110 kg) Net Weight: 176.37 lbs (80 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	<a href="#">Super X130EI-CPU</a>
Chassis	<a href="#">CSE-618TS-R5K26P</a>